# Features:

Varying cabinet depths from 5"

.080"-.125" Aluminum and polycarbonate face panels

.100" Aluminum body panels

External post mounting limitations 48" x 144"max

Panel accepts copy on one or two sides

Flush or 1/2" reveal

Can be used in conjunction with other sign systems

Mounting Options: Double External Post Wall Internal Post

5 Year Warranty



Non-illuminated Sign System



LED Illuminated Sign System


### Ideal Application:

Directional Signage Primary Site ID Secondary Site ID Tenant Listing

# Exterior Architectural Signage HED I-FLEX DATA SHEET



## HED I-FLEX- Typical Example



(1) Standard 4" x 7" radius or 3" x 7" rectangular post

- (2) Post slot offers optional flush or 1/2" reveal
- (3) Injection molded post cap
- (4) I-FLEX .100" aluminum body panel
- 5 I-FLEX hinge body extrusion
- 6 .080" .100" Aluminum or polycarbonate panel
- 7 Energy efficient LED units
- 8 Locking square with set screw

#### \*Signs include all components shown



Copy is recessed from sign face

Mounting Stud

Copy is flush with sign face

Mounting Stud

Copy extends 1/8" beyond sign face

Mounting Stud



## **5 Year Warranty Information**


Our product warranties display our employees' strong workmanship and commitment to customer satisfaction after initial purchase. Our warranties are limited to repair or replacement of original products/ services purchased.

# **Basic Colors**

Acorn

Ball

Peak

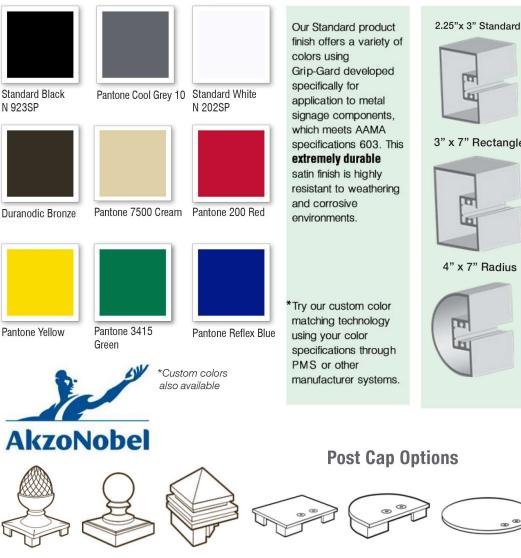

## 2" x 3" Radius 4" Fluted 10 10 3" Round 3" x 7" Rectangle 4" Round 4" x 7" Radius 3" Square 4" Square 10 Du 1 in



# **Available Post Options**

Direct Burial, Base Plate Surface Mount, and Internal Post

No Exposed Fasteners Free Technical Drawings

Quick, Same Day Quotes

Mount Install Options

Standard 2 Week Lead Time

Flat (Standards) -