

Base Plate Mount

Step 1



Carefully unpack the posts (with welded base plates) and frame assembly from the shipping cartons. Using an allen wrench, remove the post caps from the posts and set them aside. Lay the posts on the ground (using shipping cartons underneath, to avoid damage) and slide the locking squares, down from the tops of the posts, into the appropriate post slots. Slide the frame assembly into the post slots, until the frame is flush with the tops of the posts. Tighten the locking squares into position, directly beneath the frame assembly, using an allen wrench. Replace the post caps and secure.

Step 2

Using the standard (8" x 8" x 1/4") base plates, as a guide, drill corresponding holes into the foundation and insert appropriate anchors.

Lift sign assembly into place and align the base plates with the corresponding holes in the foundation. Secure the base plates, using appropriate fasteners.

*All foundation, hardware and fasteners by others.

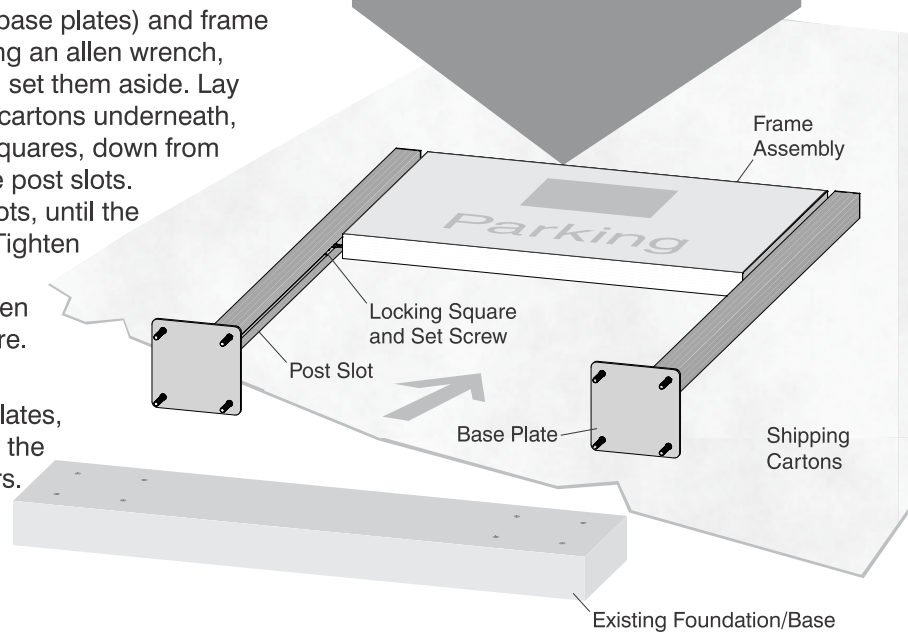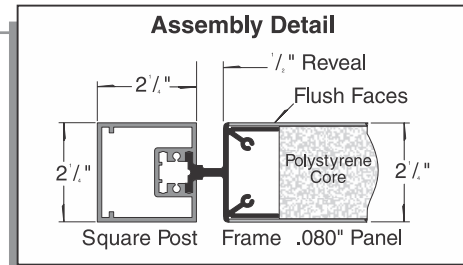

Add a Cover

