

INSTALLATION INSTRUCTIONS

Floor Models



STEP ONE



If your floor model came with wheels, attach to the bottom of the feet using provided Phillips flat head machine screws. Tighten with provided locknuts. For no wheels, skip this step.

STEP TWO



Attach the first foot by securing the underside to the bottom of the SGuard with two 3/4 screws.

STEP THREE



Finish attaching the foot by securing the sides together with an additional two 3/4 screws. Repeat for the other foot.

INCLUDED PARTS LIST



Phillips Flat head machine screw (4 per wheel)



3/4 Phillip screws (x4)




1/4 Lock nut (x20)




Swivel wheels (x2)
Locking wheels (x2)
OPTIONAL

* HANDLE WITH CARE, AS TO NOT SCRATCH ACRYLIC SURFACE

Stationary (no wheels)

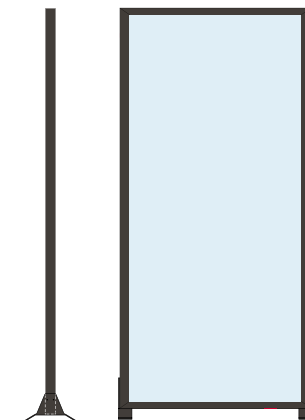

Portable (wheels)

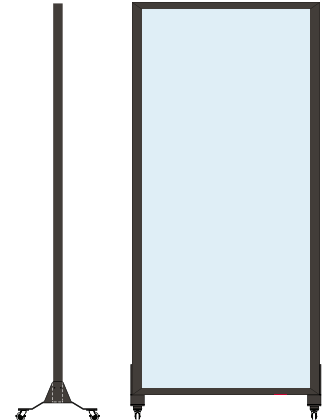

*completed assembly



MAINTENANCE CARE

To Maintain Peak Quality of Your Shield



Clean shield surfaces with an approved cleaner.
Approved house-hold cleaners and disinfectants include:
Bleach: 1/3 cup per gallon of water to dilute
Isopropyl alcohol: wipes or sprays containing at least 70%
Hydrogen peroxide: 3-5% (do not dilute)
Warm soapy water: gentle dish soap with clean water rinse



Spray cleaner on a soft cloth
or a Microfiber cloth.
DO NOT apply cleaner directly on signage!



Apply mild pressure to wipe.

Our SGuards offer cast acrylic that provides the highest clarity and UV stability for interior and exterior use. Our SGuards are also easy to clean and offer superior craze and chemical resistance.



For more product details,
installation tips, and quality
signage merchandise, visit:

howardindustries.com
800-458-0591