


Assembly and Installation Instructions

Carefully select the location of your sign to be sure that it will be readily visible to those for which it is intended. Before installing any sign, be sure that the installation does not obstruct traffic or hamper local utilities, landscape, maintenance, snow-plowing, etc...

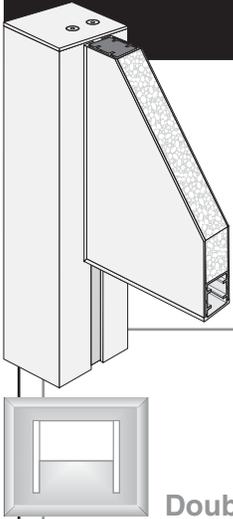




Double Post Mount

Step 1

- Carefully unpack the posts and frame assembly from the shipping cartons. Laying the posts on the ground (use shipping cartons underneath to avoid damage), slide the frame assembly into the appropriate post slots from the bottom until the frame is flush to the post caps, which are attached prior to shipping.
- Slide the locking squares into the post slots flush to the bottom of the frame and tighten in position using an allen wrench.

Step 2

- Laying the assembled sign on the ground as a guide, dig a 8" diameter x 30" min. deep hole.
- *Note:** Check local ordinances for minimum sign post embedment in your area.
- Insert the sign posts into the holes and fill each hole with concrete.
- Level the sign both horizontally and vertically.

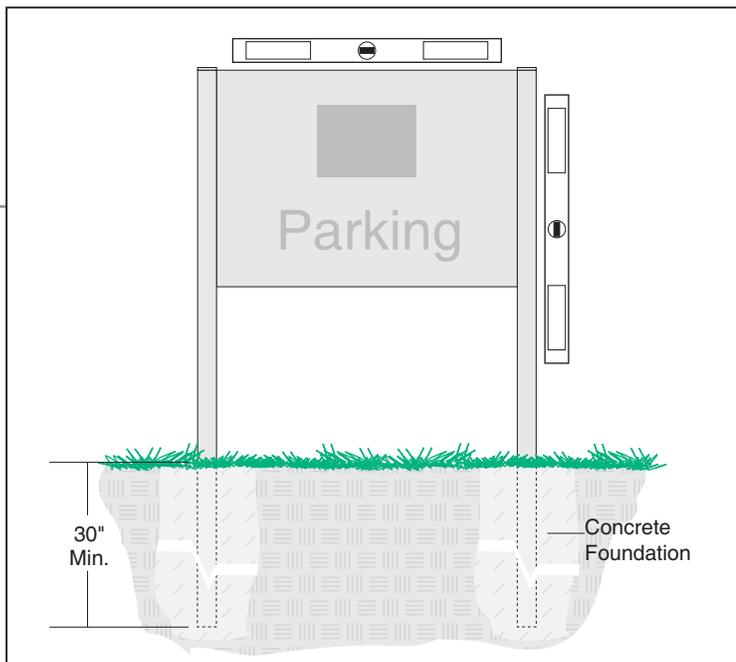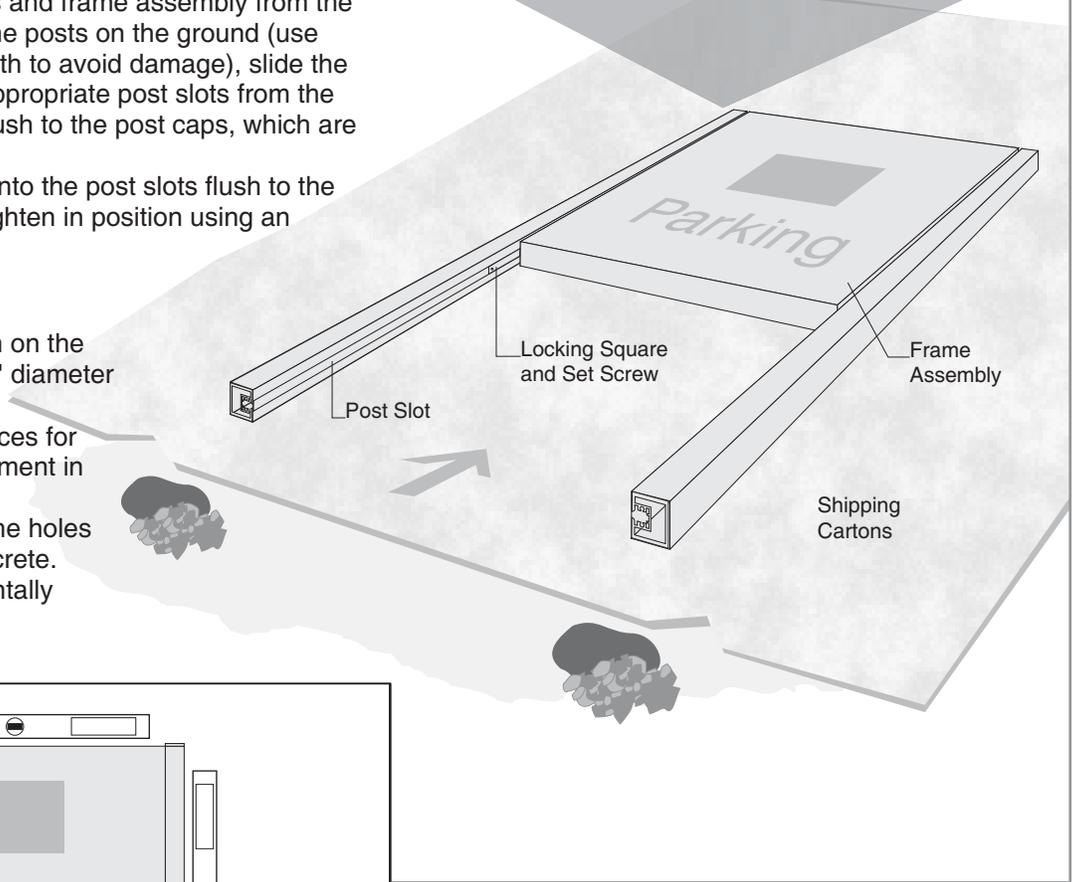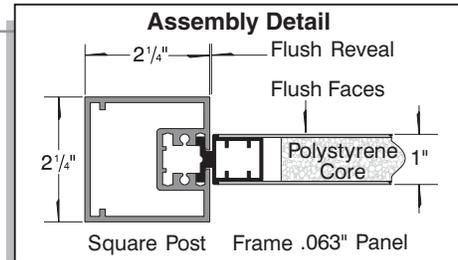




Flag Mount

Step 1

- Carefully unpack the post from the shipping carton. Laying the post on the ground as a guide, (use the shipping carton underneath to avoid damage), dig a 8" diameter x 30" min. deep hole.
- ***Note:** Check local ordinances for minimum sign post embedment in your area.
- Insert the sign post into the hole, making sure the slot is in the correct position and fill the hole with concrete.
- Level the post both horizontally and vertically.

Step 2

- Once the concrete is set, unpack the frame assembly and slide it into the appropriate post slot until the top of the frame is level with the top of the post.
- Using an allen wrench, tighten the set screw or locking square to secure the frame in the post.
- To complete the assembly attach the post cap to the top of the post using the two screws supplied.

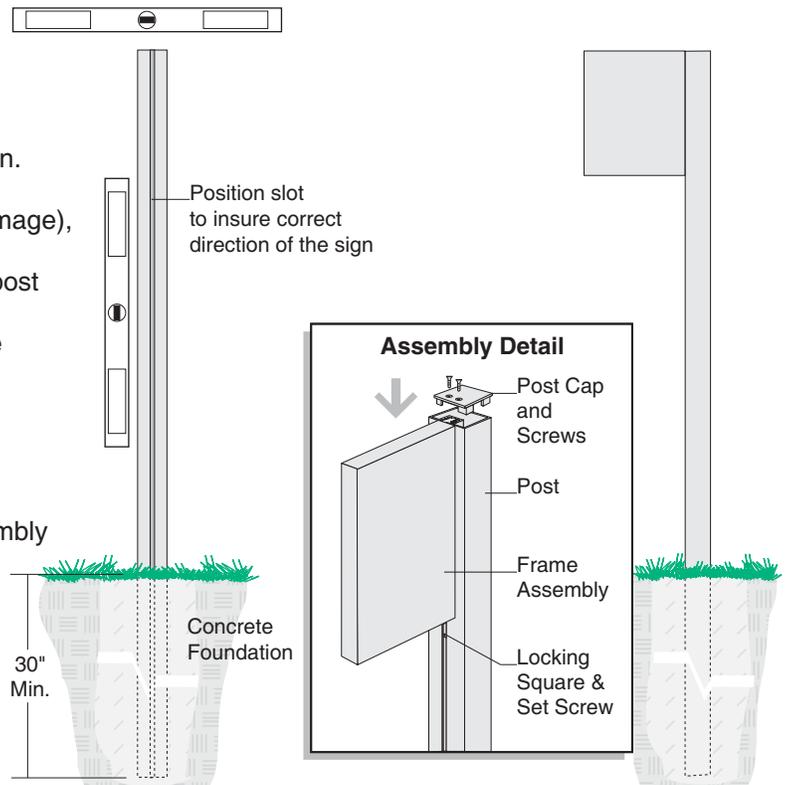

Wall Mount

Step 1

Carefully unpack the sign assembly from the shipping carton. Hold sign with brackets installed to wall and level. Lightly mark the horizontal tops and bottoms of the wall brackets and mark the "Screw Groove Locations" on all four corners of the wall brackets with a vertical mark.

Step 2

Remove the mounting brackets from the sign and align them back up to your horizontal and vertical marks. Mark and drill the mounting locations.

Step 3

Fasten brackets to the wall per your markings using appropriate countersunk fasteners, not supplied.

Step 4

Slide Sign into brackets and screw together with screws removed in Step 2.

